

WW-LBM-300

Luftbalgpresse Air Bellow Press

- > Montage & Demontage von Luftbälgen
- > Leichte, schnelle, arbeitssichere Montage
- > Kompakte Bauweise, ergonomische Design
- > Mobil oder stationär einsetzbar


- > Assembling and disassembling of air bellows
- > Easy, fast and secure assembly
- > Compact and ergonomic design
- > Mobile or stationary application



WW-LBM-300

BESTELLVARIANTEN / ORDERING OPTIONS

- | | |
|---------------|---|
| WW-LBM-300 | Luftbalgpresse ohne Pumpe
Air bellow press without pump |
| WW-LBM-300/HP | Luftbalgpresse mit Handpumpe
Air bellow press with handpump |
| WW-LBM-300/WL | Luftbalgpresse mit Lufthydraulische Pumpe
Air bellow press with air hydraulic pump |

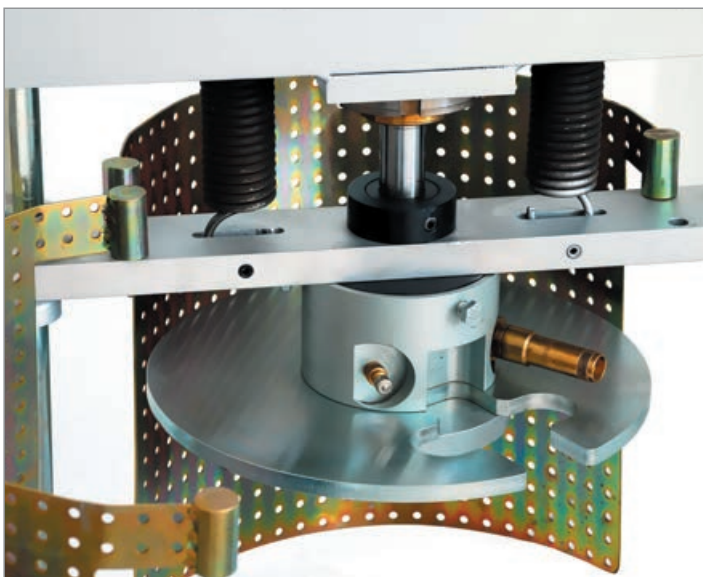

Lieferumfang / Delivery Content

Grundgestell, Pumpe nach Ausführung,
2 x Dichtscheiben

Main frame and pump according to ordering option
2 x Seal Plates

- ww-102-FB (Ø 102mm - Ø 96mm)
- ww-123-FB (Ø 123mm - Ø 117mm)

Zubehör / Accessories

Konische Dichtscheiben / Conical Seal Plates

- WW-102-FB Ø 102 mm - Ø 96 mm
- WW-123-FB Ø 123 mm - Ø 117mm
- WW-132-FB Ø 132 mm - Ø126 mm
- WW-153-FB Ø 153 mm - Ø147mm
- WW-168-FB Ø 168 mm - Ø162 mm
- WW-182-FB Ø 182 mm - Ø176 mm
- WW-192-FB Ø 192 mm - Ø186 mm
- WW-201-FB Ø 201mm - Ø195 mm



TECHNISCHE DATEN / TECHNICAL DATA

Bauhöhe / Total Height	1500 mm
Breite / Width	450 mm
Gewicht Ohne Pumpe / Weight Without Pump	66 kg
Sicherheitsventil-Öffnungsdruck / Relief Valve-Opening Pressure	5 bar