

ww-HP-40t

Hydraulic Workshop Press 40 t

ISO9001 : 2008 | Made in Eichstätt / Germany

Operation pressure 700 bar
Time and space-saving
Maintenance-free
Fast press table adjustment
Protective screen
Air hydraulic pump

Applicable in automobile, commercial vehicle, agricultural machine workshops, as well as mechanical shops. Ideal for force fitting and extraction of bearings, bushings, shafts and bolts. Perfectly suited for embossing, bending, aligning and stamping. Press table can be positioned both up and down side by cable winch that allows the handling of various work pieces.

Technical Data

Type	ww-HP-40t
Capacity	40 ton / 393 kN
Hydraulic pump	700 bar (Air hydraulic)
Cylinder type	Single acting
Height	2050 mm
Width	1250 mm
Width between columns	300 mm
Inner width	780 mm
Lowest insert height	550 mm
Boring distance in height	140 mm
Cylinder stroke	175 mm
Weight	630 kg

SCOPE OF SUPPLY


Rugged frame press with press table
Protective screen. Single acting cylinder
Air hydraulic pump.
Manometer and accessories;
1 pressure tappet flat, 1 pressure tappet conical.

ACCESSORIES FOR ww-HP-40t



ww-AP-40-1

- 2 x base plate with borehole diameter 100




ww-AP-40-4

- 2 x base plate with milled prism



ww-AP-40-2

- 2 x base plate with prism

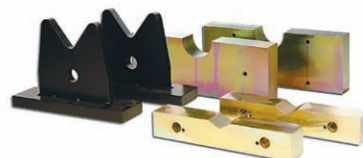

ww-AP-40-Set

- Base plate complete set
- Complete set consisting of ww-AP-40-1, ww-AP-40-2 and ww-AP-40-4.

ADDITIONAL ORDER VERSION

Double acting hydraulic cylinder with electro-hydraulic power unit

