


Double Acting Multi Strand Jacks - Short Profile

Features

- Pre-stressing and post tensioning of tendons in concrete structure.
- Ideal for applications where horizontal space available for insertion of the jack is less.
- With wedgelock cylinder for different strand (tendon) configuration.

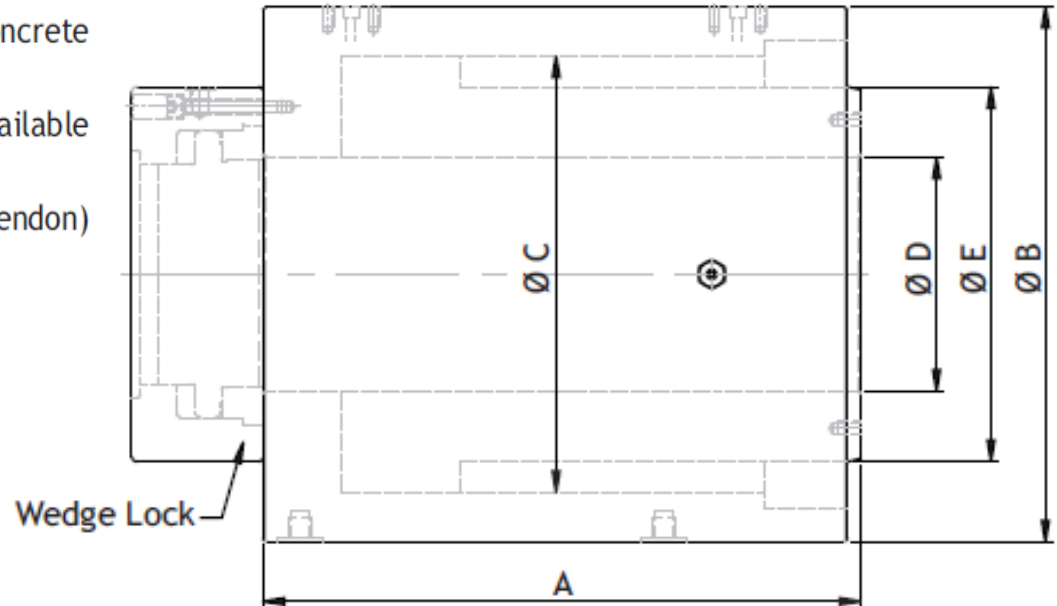

Capacity (ton)	Stroke (mm)	Model	Strand Arrangement	Effective Area (cm ²)	Oil Cap. (cc)	Working Pressure (kg/cm ²)	Close Height (mm) A	Cylinder OD (mm) B	Bore Dia. (mm) C	C'hole Dia. (mm) D	Ram Dia. (mm) E	Wt. (Approx.) (kg)
100	200	OMS 100-200-70	406	289.6	5795	345	405	255	210	70	160	165
200	200	OMS 200-200-145	1205,706	366.8	7340	545	395	330	275	145	230	185
300	200	OMS 300-200-175	1905,1206	593.5	11870	505	440	400	340	175	280	305
420	200	OMS 420-200-190	2205,1206	659.7	13195	637	530	440	370	190	300	450