


PANCAKE JACKS - PLAIN RAM

Capacity 10 - 200 ton / Stroke 10 mm / Max. Working Pressure 700 bar

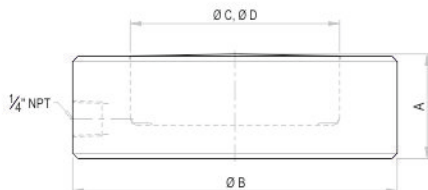

Application

- Used in confined area with extremely low clearance.
- Ideally suited for precision lifting, alignment of machinery, heavy structures and removal of pulleys / sprockets on taper seats.
- Caution - Provide a level and solid support for entire jack base area since the ram guide length is small.

■ PJM
■ Single acting Load return
■ Plain ram
■ Very Low Height
■ Capacity - Ton
■ Stroke - mm

PLPVL SERIES	Cylinder capacity (ton)	Stroke (mm)	Model	Effective area (cm ²)	Oil cap. (cc)	Closed height (mm) A	Cylinder OD (mm) B	Bore dia (mm) C	Ram dia (mm) D	Wt. (Approx.) (kg)	Suitable pump
	10	10	PLPVL 10-10	15.9	16	30	85	45	45	1.5	PHP-1P4-2-1.8
	20		PLPVL 20-10	31.2	31	35	100	63	63	2	
	30		PLPVL 30-10	44.2	44	40	120	75	75	3.5	
	50		PLPVL 50-10	78.5	79	50	155	100	100	7.5	
	100		PLPVL 100-10	153.9	154	70	210	140	140	19	
	150		PLPVL 150-10	227.0	227	75	260	170	170	31	PHP-2P4-2-5
	200		PLPVL 200-10	314.2	314	80	300	200	200	43	

- Higher capacity and customized solutions on request.
- Specifications are subject to change due to continual improvement.