


PULL CYLINDER-PLAIN RAM, SINGLE ACTING, SPRING RETURN

Capacity 10 - 30 ton / Stroke - 150 mm / Max. Working Pressure 700 bar

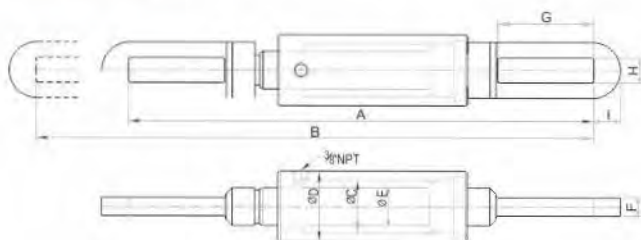

Features :

- Compression spring automatically extends piston rod when pump pressure is released.

■ Application

For Pulling and tensioning in Heavy fabrication and maintenance.

 PJM
  Spring Return
  Pull
  Cylinder
  Capacity - Ton
  Stroke - mm

Capacity (ton)	Stroke (mm)	Model	Effective Area (cm ²)	Oil capacity (cc)	Closed Height A (mm)	Extended Height B (mm)	Bore dia C (mm)	Ram dia D (mm)	Cylinder OD E (mm)	Link Thickness F (mm)	Slot Opening G (mm)	Slot Width H (mm)	Slot to Link end I (mm)	Approx Weight (kg)
10	150	PSPC-10-150	15.3	230	541	691	63	45	85	22	115	30	32	14
20		PSPC-20-150	32.1	485	620	770	85	56	115	28	125	40	36	28
30		PSPC-30-150	47.4	715	670	820	100	63	135	32	132	45	40	48

- Higher capacity and customized solutions on request.
- Specifications are subject to change due to continual improvement.